

VEICHI


VCS Series Monocrystalline Module




VCS-108H-XXX-D

Electrical performance parameters	VCS-108H-405-D	VCS-108H-410-D	VCS-108H-415-D	VCS-108H-420-D	VCS-108H-425-D	VCS-108H-430-D
Component performance under STC standard (tolerance: 0~+5W)						
Maximum rated power (W)	405	410	415	420	425	430
Maximum power voltage (V)	31.40	31.59	31.78	31.96	32.15	32.33
Maximum power current (A)	12.90	12.98	13.06	13.14	13.22	13.30
Open circuit voltage (V)	38.07	38.20	38.33	38.46	38.59	38.72
Short circuit current (A)	13.85	13.93	14.01	14.09	14.17	14.25
Component efficiency (%)	20.74	21.00	21.25	21.51	21.76	22.02
Component performance under the NOCT standard						
Maximum rated power (W)	309.8	313.5	317.3	321.1	325	328.7
Maximum power voltage (V)	29.45	29.60	29.70	29.90	30.00	30.20
Maximum power current (A)	10.52	10.60	10.68	10.75	10.82	10.89
Open circuit voltage (V)	36.20	36.30	36.40	36.50	36.60	36.80
Short circuit current (A)	11.16	11.23	11.30	11.36	11.42	11.49
Temperature Characteristic						
Maximum power temperature coefficient (Pmax)			-0.34%°C			
Open circuit voltage temperature coefficient (Voc)			-0.26%°C			
Short circuit voltage temperature coefficient (Isc)			-0.05%°C			
Working temperature			-40~ + 85°C			
Rated operating cell temperature (NMOT)			42±2°C			
STC (standard test environment): irradiance 1000W/ m ² , battery temperature 25 °C ,spectral AM1.5, NOCT (nominal operating temperature of the module) irradiance800W/m ² , ambient temperature 20 °C, spectral AM1.5, wind speed 1m/s;						
Mechanical behavior						
Specifications	N-TOPCON 182X182mm					
Battery arrangement	N-TOPCON 108 [2X (9X6)]					
Component dimensions	1722X 1134 X 30mm					
Component weight	24.5kg					
Component panel	2mm-2mm semi tempered glass					
Component Border	Anodic oxygen film aluminum alloy					
Junction box	IP68, 3 Diodes					
Wireway	4.0 square millimeters (IEC)					
Wire length (including connectors)	300mm, wire length can be customized					
Connector	KSW-CN01					
Working conditions						
Maximum system voltage	1000V/1500V/DC(IEC)					
Fusing current	30A					
Static load	Snow load: 5400Pa/Wind load: 2400Pa					
Grounding resistance	$\leq 0.1\Omega$					
Safety level	II					
Insulation resistance	$\geq 100M\Omega$					
Packaging Information						
Container size	40HQ					
Sheet/Tray	36					
Pallets/Containers	26					
Pieces/Container	936					
Package size	1740*1120*1235mm					
Package weight	930kg					

Technical drawings

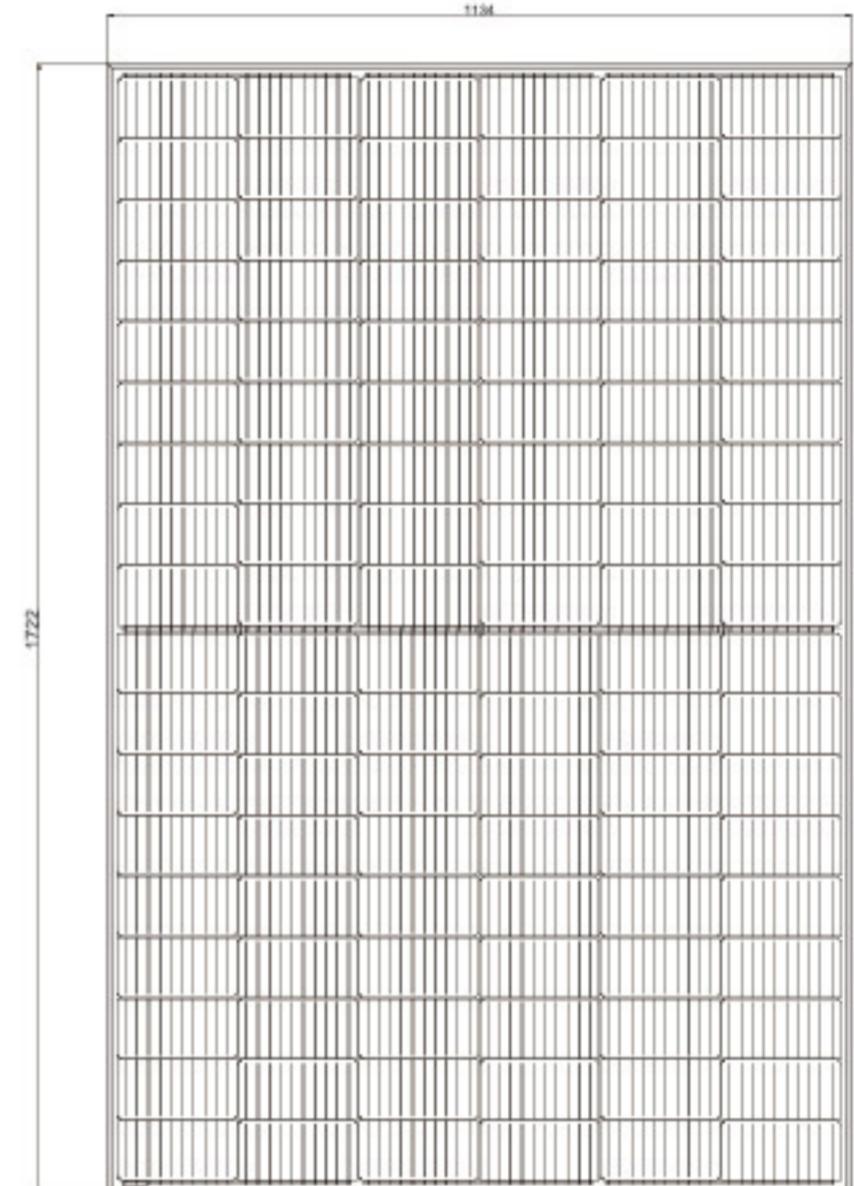

Front View

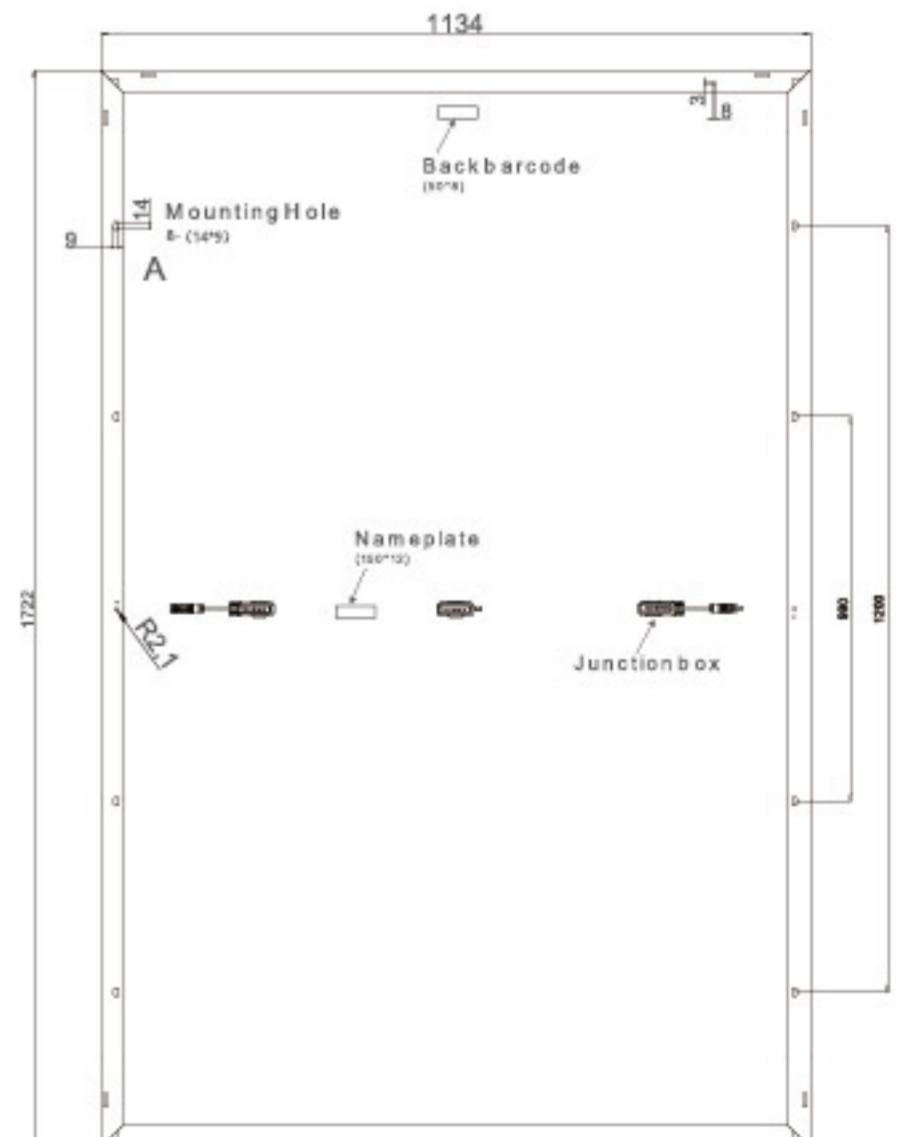


Rear View

The technical parameters contained in this technical parameter document may deviate slightly, and VEICHI does not guarantee their complete accuracy. Due to continuous innovation, research and development, and product improvement, VEICHI has the right to, without prior notice, Adjust the information in the technical parameter file at any time. When signing a contract, the customer should obtain the latest version of technical parameters as part of a binding contract signed by both parties.


VCS-144H-XXX-D

Electrical performance parameters	VCS-144H-560-D	VCS-144H-565-D	VCS-144H-570-D	VCS-144H-575-D	VCS-144H-580-D	VCS-144H-585-D
Component performance under STC standard (tolerance: 0~+5W)						
Maximum rated power (W)	560	565	570	575	580	585
Maximum power voltage (V)	42.20	43.32	42.44	42.56	42.68	42.80
Maximum power current (A)	13.27	13.35	13.43	13.51	13.59	13.67
Open circuit voltage (V)	50.90	51.03	51.16	51.29	51.42	51.53
Short circuit current (A)	14.00	14.08	14.16	14.24	14.32	14.41
Component efficiency (%)	21.67	21.86	22.06	22.25	22.44	22.64
Component performance under the NOCT standard						
Maximum rated power (W)	426.9	430.7	434.6	438.4	442.1	446.2
Maximum power voltage (V)	39.80	39.90	40.10	40.20	40.30	40.42
Maximum power current (A)	10.72	10.79	10.85	10.91	10.97	11.04
Open circuit voltage (V)	48.30	48.50	48.60	48.70	48.80	48.92
Short circuit current (A)	11.29	11.35	11.42	11.48	11.55	11.62
Temperature Characteristic						
Maximum power temperature coefficient (Pmax)			-0.34%°C			
Open circuit voltage temperature coefficient (Voc)			-0.26%°C			
Short circuit voltage temperature coefficient (Isc)			-0.05%°C			
Working temperature			-40~ + 85°C			
Rated operating cell temperature (NMOT)			42±2°C			
STC (standard test environment): irradiance 1000W/ m ² , battery temperature 25 °C ,spectral AM1.5, NOCT (nominal operating temperature of the module) irradiance800W/m ² , ambient temperature 20 °C, spectral AM1.5, wind speed 1m/s;						
Mechanical behavior						
Specifications			N-TOPCON 182X182mm			
Battery arrangement			N-TOPCON 144 [2X (6X12)]			
Component dimensions			2279 X 1134 X 30mm			
Component weight			31.5kg			
Component panel			2mm-2mm semi tempered glass			
Component Border			Anodic oxygen film aluminum alloy			
Junction box			IP68, 3 Diodes			
Wireway			4.0 square millimeters (IEC)			
Wire length (including connectors)			300mm, wire length can be customized			
Connector			KSW-CN01			
Working conditions						
Maximum system voltage			1000V/1500V/DC(IEC)			
Fusing current			30A			
Static load			Snow load: 5400Pa/Wind load: 2400Pa			
Grounding resistance			≤ 0.1Ω			
Safety level			II			
Insulation resistance			≥ 100M Ω			
Packaging Information						
Container size			40HQ			
Sheet/Tray			36			
Pallets/Containers			20			
Pieces/Container			720			
Package size			2300*1120*1235mm			
Package weight			1190kg			

Technical drawings

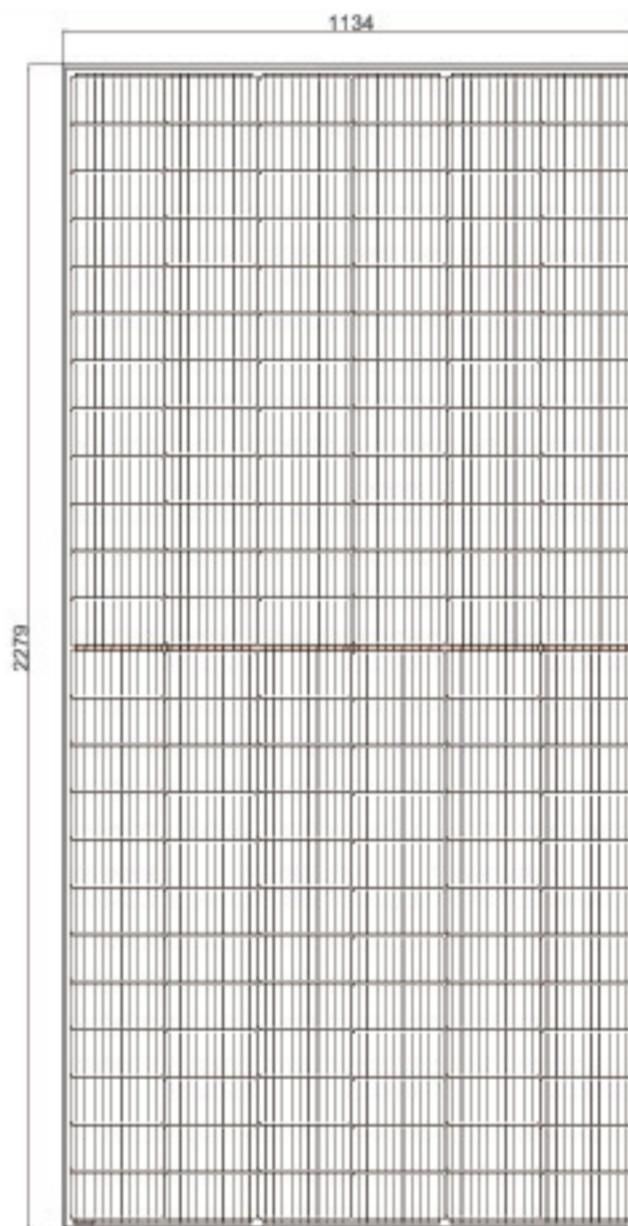

Front View

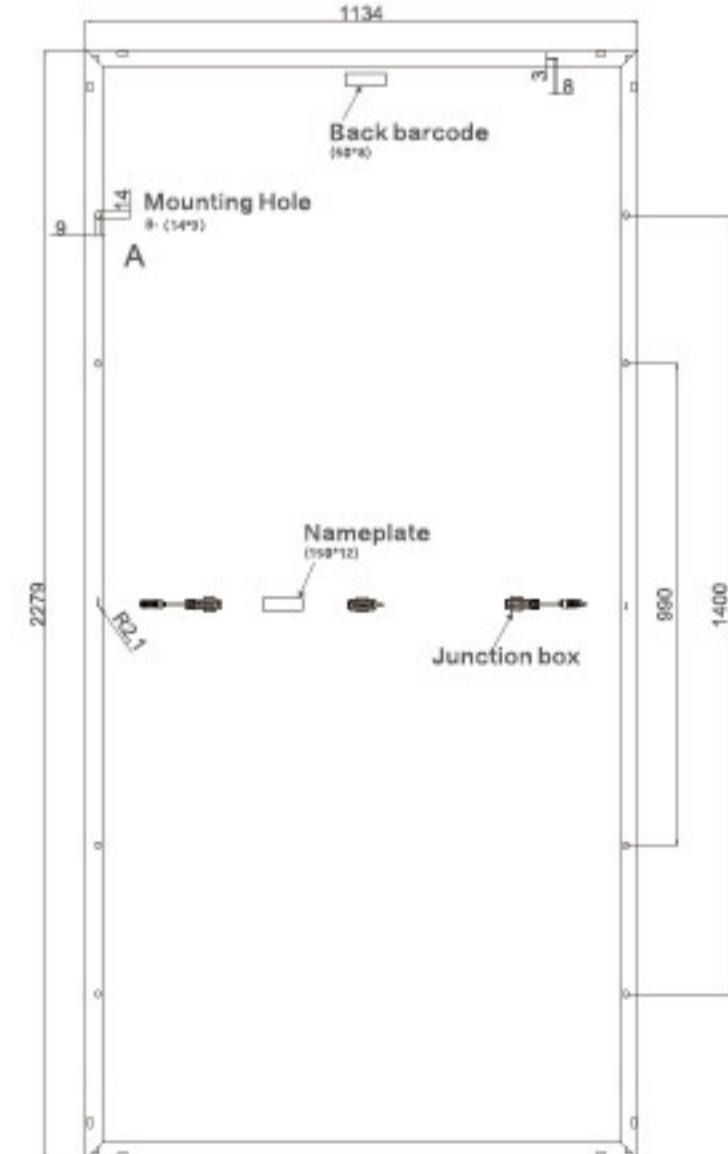



Rear View

The technical parameters contained in this technical parameter document may deviate slightly, and VEICHI does not guarantee their complete accuracy. Due to continuous innovation, research and development, and product improvement, VEICHI has the right to, without prior notice, Adjust the information in the technical parameter file at any time. When signing a contract, the customer should obtain the latest version of technical parameters as part of a binding contract signed by both parties.

VCS-156H-XXX-D

Electrical performance parameters	VCS-156H-605-D	VCS-156H-610-D	VCS-156H-615-D	VCS-156H-620-D	VCS-156H-625-D	VCS-156H-630-D
Component performance under STC standard (tolerance: 0~+5W)						
Maximum rated power (W)	605	610	615	620	625	630
Maximum power voltage (V)	44.66	44.78	44.90	45.02	45.14	45.26
Maximum power current (A)	13.55	13.62	13.70	13.77	13.85	13.92
Open circuit voltage (V)	53.86	53.98	54.10	54.22	54.34	54.46
Short circuit current (A)	14.19	14.26	14.33	14.40	14.47	14.54
Component efficiency (%)	21.64	21.82	22.00	22.18	22.36	22.54
Component performance under the NOCT standard						
Maximum rated power (W)	461	464.5	468.4	471.7	475.9	479.5
Maximum power voltage (V)	42.30	42.50	42.60	42.70	42.90	43.00
Maximum power current (A)	10.89	10.93	10.99	11.04	11.10	11.15
Open circuit voltage (V)	51.00	51.20	51.40	51.50	51.60	51.70
Short circuit current (A)	11.44	11.50	11.56	11.61	11.67	11.72
Temperature Characteristic						
Maximum power temperature coefficient (Pmax)			-0.34%°C			
Open circuit voltage temperature coefficient (Voc)			-0.26%°C			
Short circuit voltage temperature coefficient (Isc)			-0.05%°C			
Working temperature			-40~ + 85°C			
Rated operating cell temperature (NMOT)			42±2°C			
STC (standard test environment): irradiance 1000W/ m ² , battery temperature 25 °C ,spectral AM1.5, NOCT (nominal operating temperature of the module) irradiance800W/m ² , ambient temperature 20 °C, spectral AM1.5, wind speed 1m/s;						
Mechanical behavior						
Specifications	N-TOPCON 182X182mm					
Battery arrangement	N-TOPCON 156 [2X (6X13)]					
Component dimensions	2465 X 1134 X 30mm					
Component weight	34.6kg					
Component panel	2mm-2mm semi tempered glass					
Component Border	Anodic oxygen film aluminum alloy					
Junction box	IP68, 3 Diodes					
Wireway	4.0 square millimeters (IEC)					
Wire length (including connectors)	300mm, wire length can be customized					
Connector	KSW-CN01					
Working conditions						
Maximum system voltage	1000V/1500V/DC(IEC)					
Fusing current	30A					
Static load	Snow load: 5400Pa/Wind load: 2400Pa					
Grounding resistance	≤ 0.1Ω					
Safety level	II					
Insulation resistance	≥ 100M Ω					
Packaging Information						
Container size	40HQ					
Sheet/Tray	36					
Pallets/Containers	16					
Pieces/Container	496					
Package size	2497*1120*1235mm					
Package weight	1300kg					


The technical parameters contained in this technical parameter document may deviate slightly, and VEICHI does not guarantee their complete accuracy. Due to continuous innovation, research and development, and product improvement, VEICHI has the right to, without prior notice, Adjust the information in the technical parameter file at any time. When signing a contract, the customer should obtain the latest version of technical parameters as part of a binding contract signed by both parties.

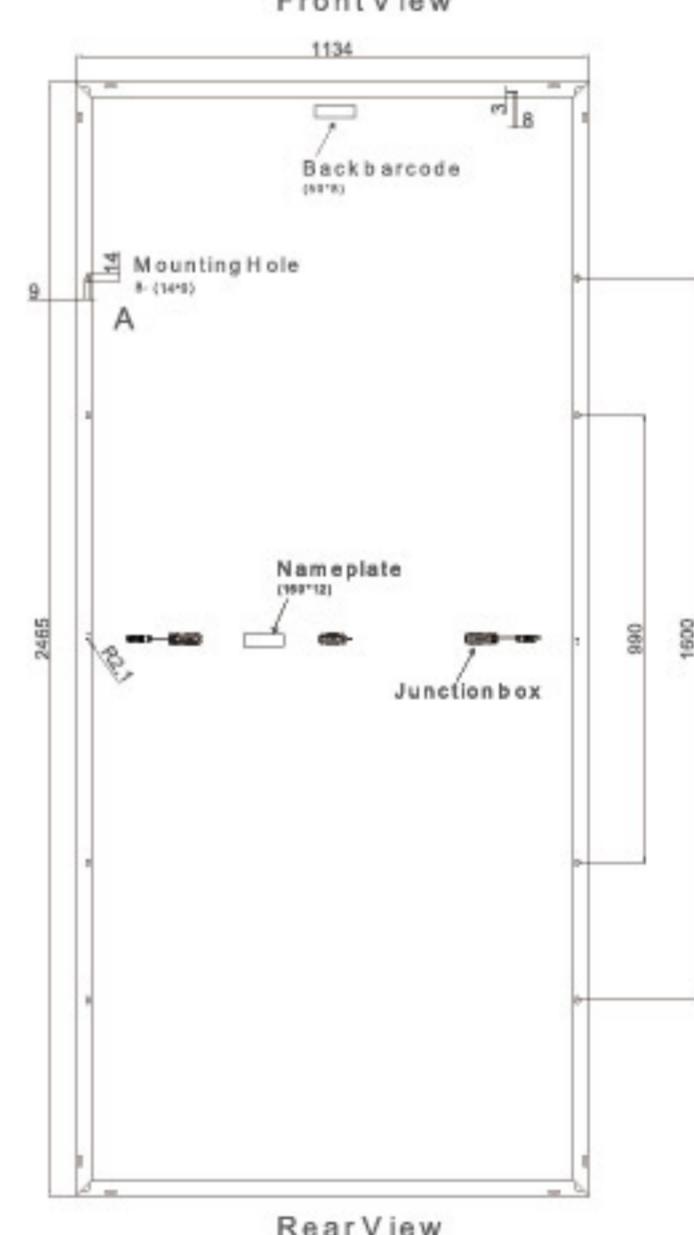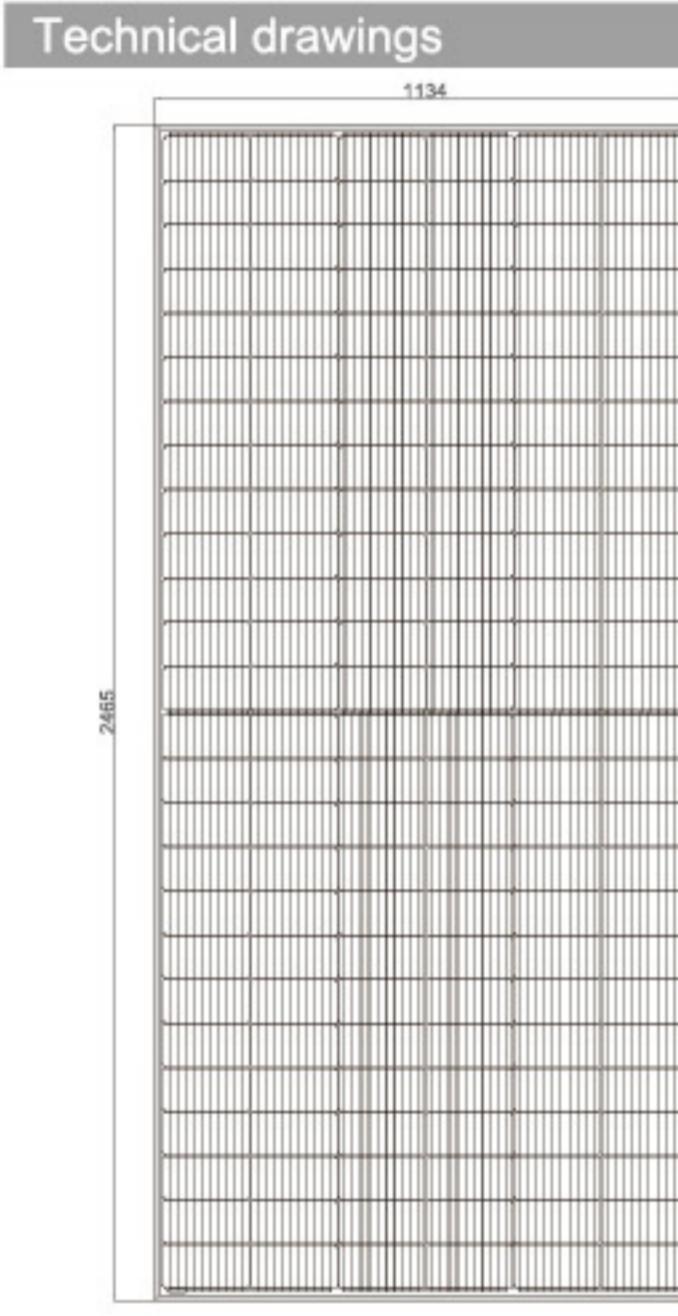


VCS-108H-XXX-P

Electrical performance parameters	VCS-108H-390-P	VCS-108H-395-P	VCS-108H-400-P	VCS-108H-405-P	VCS-108H-410-P	VCS-108H-415P
Component performance under STC standard (tolerance: 0~+5W)						
Maximum rated power (W)	390	395	400	405	410	415
Maximum power voltage (V)	30.64	30.84	31.01	31.21	31.45	31.61
Maximum power current (A)	12.73	12.81	12.90	12.98	13.04	13.13
Open circuit voltage (V)	36.85	36.98	37.07	37.23	37.32	37.45
Short circuit current (A)	13.61	13.70	13.79	13.87	13.95	14.02
Component efficiency (%)	19.97	20.22	20.48	20.74	20.99	21.25
Component performance under the NOCT standard						
Maximum rated power (W)	294	298	302	306	310	314
Maximum power voltage (V)	28.87	29.08	29.26	29.47	29.72	29.89
Maximum power current (A)	10.18	10.25	10.32	10.38	10.43	10.50
Open circuit voltage (V)	34.62	34.75	34.88	35.12	35.23	35.37
Short circuit current (A)	10.89	10.96	11.03	11.10	11.16	11.22
Temperature Characteristic						
Maximum power temperature coefficient (Pmax)			-0.34%°C			
Open circuit voltage temperature coefficient (Voc)			-0.26%°C			
Short circuit voltage temperature coefficient (Isc)			-0.05%°C			
Working temperature			-40~ + 85°C			
Rated operating cell temperature (NMOT)			42±2°C			
STC (standard test environment): irradiance 1000W/ m ² , battery temperature 25 °C ,spectral AM1.5, NOCT (nominal operating temperature of the module) irradiance800W/m ² , ambient temperature 20 °C, spectral AM1.5, wind speed 1m/s;						
Mechanical behavior						
Specifications	Single crystal silicon182X182mm					
Battery arrangement	Single crystal 108 [2X (9X6)]					
Component dimensions	1722X 1134 X 30mm					
Component weight	21kg					
Component panel	3.2mm tempered coated glass					
Component Border	Anodic oxygen film aluminum alloy					
Junction box	IP68, 3 Diodes					
Wireway	4.0 square millimeters (IEC)					
Wire length (including connectors)	300mm, wire length can be customized					
Connector	KSW-CN01					
Working conditions						
Maximum system voltage	1000V/1500V/DC(IEC)					
Fusing current	25A					
Static load	Snow load: 5400Pa/Wind load: 2400Pa					
Grounding resistance	≤ 0.1Ω					
Safety level	II					
Insulation resistance	≥ 100M Ω					
Packaging Information						
Container size	40HQ					
Sheet/Tray	36					
Pallets/Containers	26					
Pieces/Container	936					
Package size	1740*1120*1235mm					
Package weight	770kg					

Technical drawings

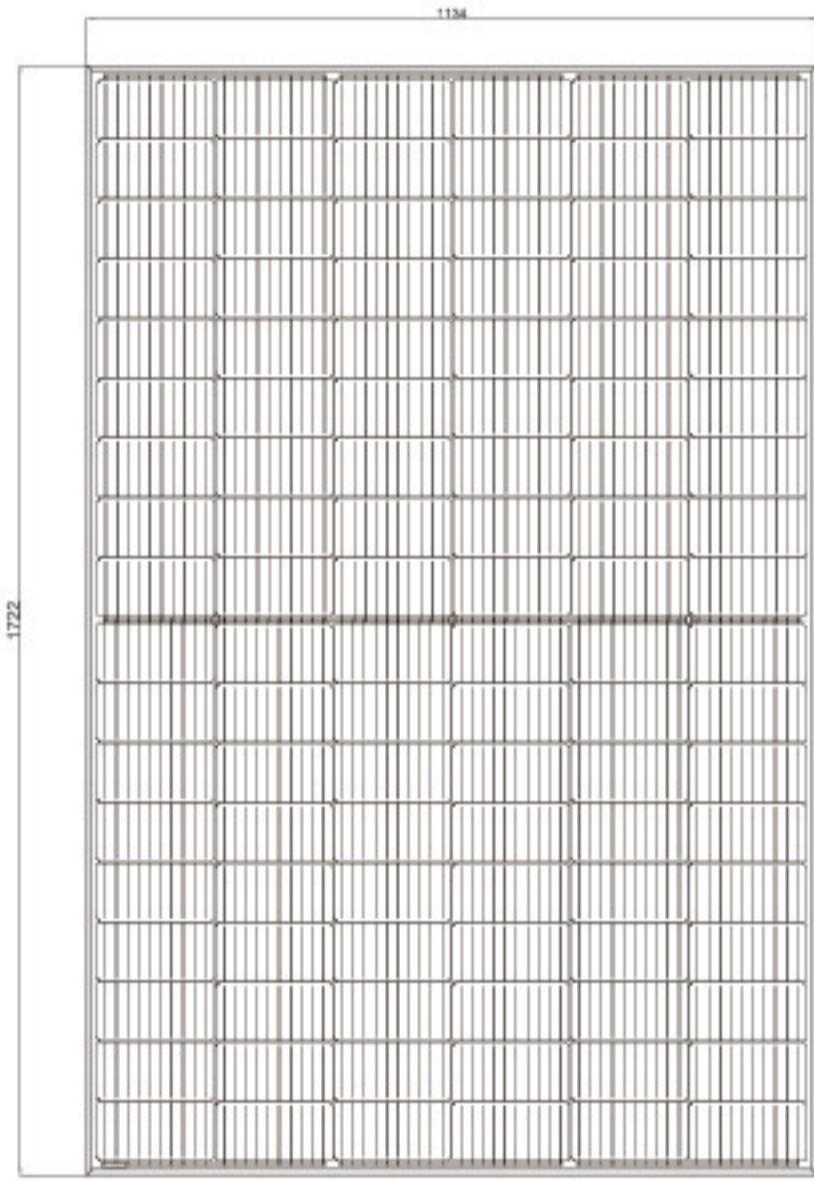

Front View

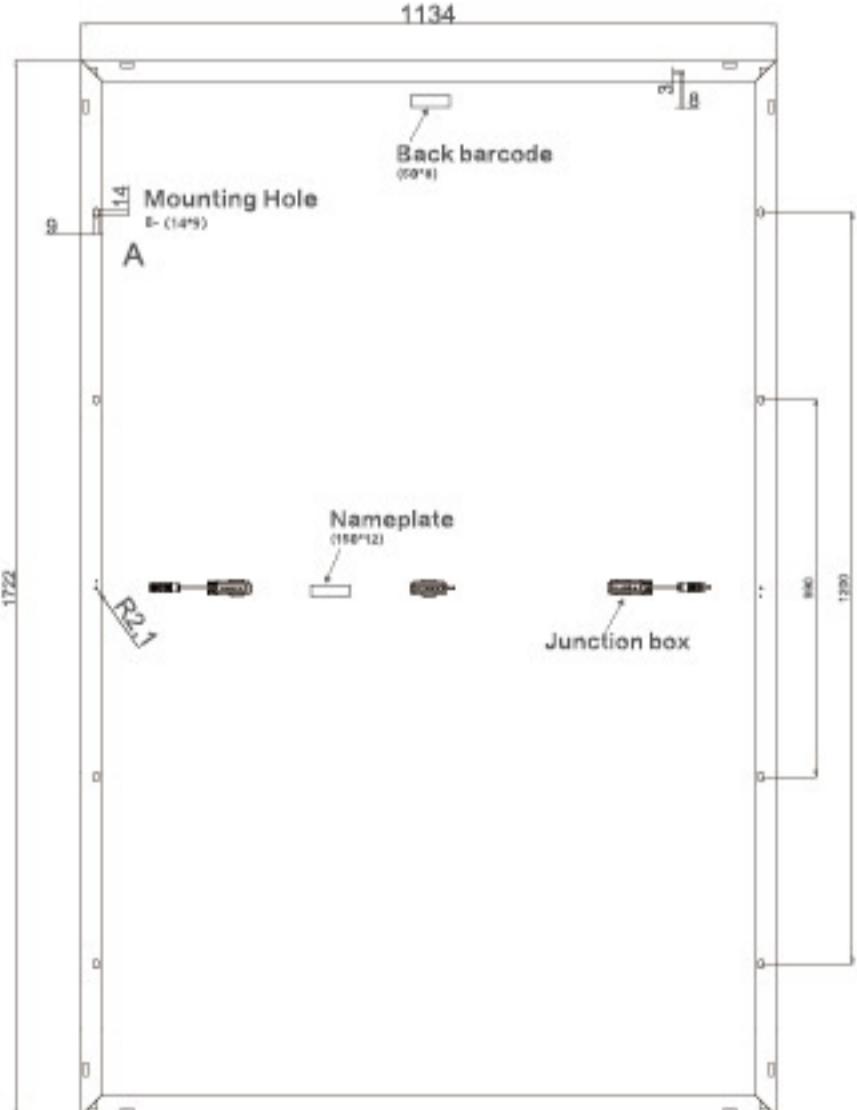


Rear View

The technical parameters contained in this technical parameter document may deviate slightly, and VEICHI does not guarantee their complete accuracy. Due to continuous innovation, research and development, and product improvement, VEICHI has the right to, without prior notice, Adjust the information in the technical parameter file at any time. When signing a contract, the customer should obtain the latest version of technical parameters as part of a binding contract signed by both parties.


VCS-144H-XXX-P

Electrical performance parameters	VCS-144H-530-P	VCS-144H-535-P	VCS-144H-540-P	VCS-144H-545-P	VCS-144H-550-P	VCS-144H-555-P
Component performance under STC standard (tolerance: 0~+5W)						
Maximum rated power (W)	530	535	540	545	550	555
Maximum power voltage (V)	41.32	41.48	41.64	41.80	41.96	42.11
Maximum power current (A)	12.83	12.90	12.97	13.04	13.11	13.18
Open circuit voltage (V)	49.32	49.46	49.60	49.76	49.92	50.08
Short circuit current (A)	13.72	13.79	13.86	13.93	14.00	14.06
Component efficiency (%)	20.51	20.70	20.89	21.09	21.28	21.48
Component performance under the NOCT standard						
Maximum rated power (W)	395	398	402	406	410	414
Maximum power voltage (V)	38.06	38.70	38.80	39.00	39.11	39.18
Maximum power current (A)	10.24	10.30	10.36	10.41	10.48	10.57
Open circuit voltage (V)	46.40	46.50	46.70	46.80	47.00	47.07
Short circuit current (A)	11.06	11.12	11.17	11.23	11.28	11.34
Temperature Characteristic						
Maximum power temperature coefficient (Pmax)			-0.34%°C			
Open circuit voltage temperature coefficient (Voc)			-0.26%°C			
Short circuit voltage temperature coefficient (Isc)			-0.05%°C			
Working temperature			-40~ + 85°C			
Rated operating cell temperature (NMOT)			42±2°C			
STC (standard test environment): irradiance 1000W/ m ² , battery temperature 25 °C ,spectral AM1.5, NOCT (nominal operating temperature of the module) irradiance800W/m ² , ambient temperature 20 °C, spectral AM1.5, wind speed 1m/s;						
Mechanical behavior						
Specifications			Single crystal silicon 182X182mm			
Battery arrangement			Single crystal 144 [2X (6X12)]			
Component dimensions			2279 X 1134 X 35mm			
Component weight			29kg			
Component panel			3.2mm tempered coated glass			
Component Border			Anodic oxygen film aluminum alloy			
Junction box			IP68, 3 Diodes			
Wireway			4.0 square millimeters (IEC)			
Wire length (including connectors)			300mm, wire length can be customized			
Connector			KSW-CN01			
Working conditions						
Maximum system voltage			1000V/1500V/DC(IEC)			
Fusing current			25A			
Static load			Snow load: 5400Pa/Wind load: 2400Pa			
Grounding resistance			≤ 0.1Ω			
Safety level			II			
Insulation resistance			≥ 100M Ω			
Packaging Information						
Container size			40HQ			
Sheet/Tray			31			
Pallets/Containers			20			
Pieces/Container			620			
Package size			2300*1120*1235mm			
Package weight			939kg			

Technical drawings

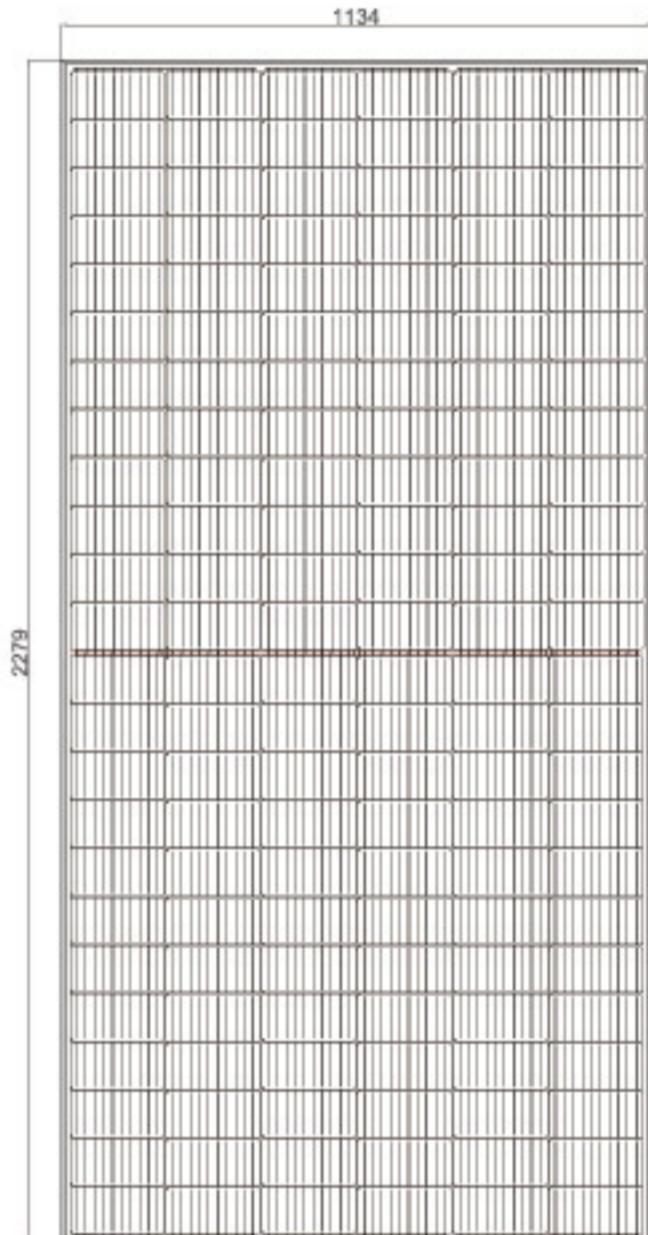

Front View

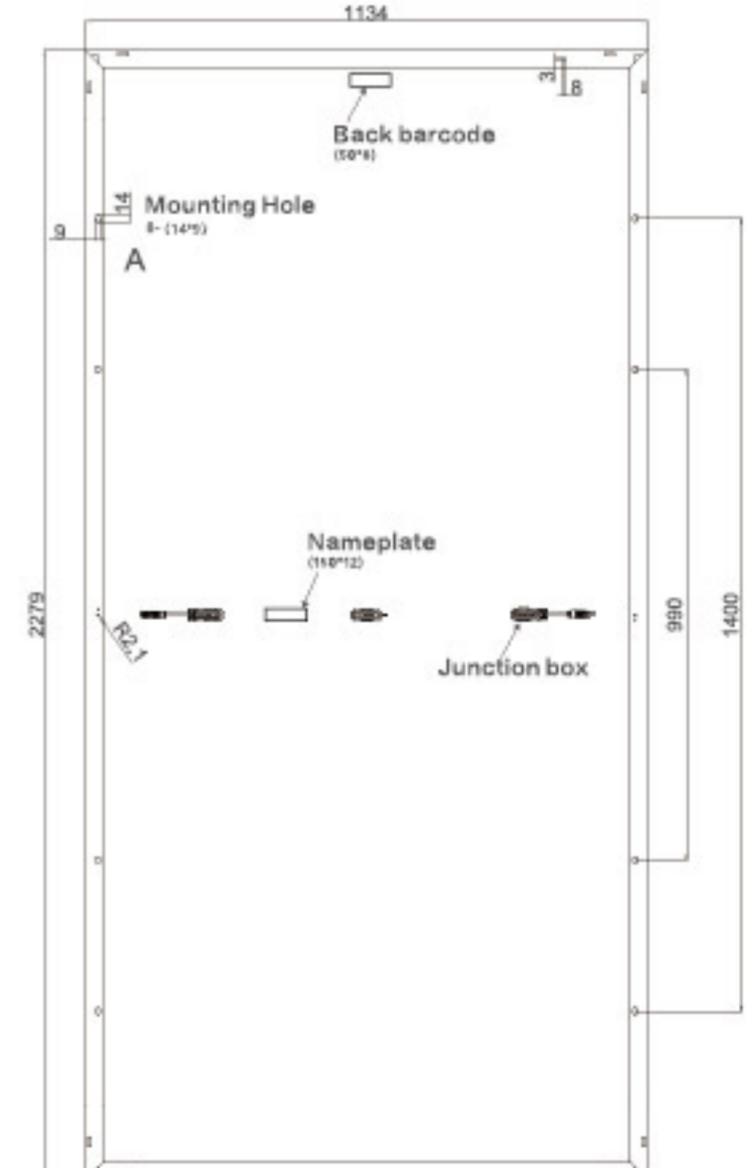


Rear View

The technical parameters contained in this technical parameter document may deviate slightly, and VEICHI does not guarantee their complete accuracy. Due to continuous innovation, research and development, and product improvement, VEICHI has the right to, without prior notice, Adjust the information in the technical parameter file at any time. When signing a contract, the customer should obtain the latest version of technical parameters as part of a binding contract signed by both parties.


VCS-156H-XXX-P

Electrical performance parameters	VCS-156H-575-P	VCS-156H-580-P	VCS-156H-585-P	VCS-156H-590-P	VCS-156H-595-P	VCS-156H-600-P
Component performance under STC standard (tolerance: 0~+5W)						
Maximum rated power (W)	575	580	585	590	595	600
Maximum power voltage (V)	44.20	44.35	44.56	44.80	45.05	45.30
Maximum power current (A)	13.01	13.08	13.13	13.17	13.21	13.25
Open circuit voltage (V)	53.44	53.11	53.20	53.33	53.40	53.50
Short circuit current (A)	13.72	13.84	13.88	13.93	13.98	14.03
Component efficiency (%)	20.57	20.75	20.93	21.11	21.29	21.46
Component performance under the NOCT standard						
Maximum rated power (W)	428	432	436	440	444	448
Maximum power voltage (V)	41.08	41.91	42.11	42.23	42.37	42.47
Maximum power current (A)	10.24	10.31	10.36	10.42	10.48	10.55
Open circuit voltage (V)	50.30	50.40	50.60	50.70	50.80	50.90
Short circuit current (A)	11.06	11.12	11.17	11.23	11.28	11.34
Temperature Characteristic						
Maximum power temperature coefficient (Pmax)			-0.34%°C			
Open circuit voltage temperature coefficient (Voc)			-0.26%°C			
Short circuit voltage temperature coefficient (Isc)			-0.05%°C			
Working temperature			-40~ + 85°C			
Rated operating cell temperature (NMOT)			42±2°C			
STC (standard test environment): irradiance 1000W/ m ² , battery temperature 25 °C ,spectral AM1.5, NOCT (nominal operating temperature of the module) irradiance800W/m ² , ambient temperature 20 °C, spectral AM1.5, wind speed 1m/s;						
Mechanical behavior						
Specifications	Single crystal silicon 182X182mm					
Battery arrangement	Single crystal 156 [2X (6X13)]					
Component dimensions	2465 X 1134 X 35mm					
Component weight	31.5kg					
Component panel	3.2mm tempered coated glass					
Component Border	Anodic oxygen film aluminum alloy					
Junction box	IP68, 3 Diodes					
Wireway	4.0 square millimeters (IEC)					
Wire length (including connectors)	300mm, wire length can be customized					
Connector	KSW-CN01					
Working conditions						
Maximum system voltage	1000V/1500V/DC(IEC)					
Fusing current	25A					
Static load	Snow load: 5400Pa/Wind load: 2400Pa					
Grounding resistance	$\leq 0.1\Omega$					
Safety level	II					
Insulation resistance	$\geq 100M\Omega$					
Packaging Information						
Container size	40HQ					
Sheet/Tray	31					
Pallets/Containers	16					
Pieces/Container	496					
Package size	2497*1120*1235mm					
Package weight	1030kg					

Technical drawings

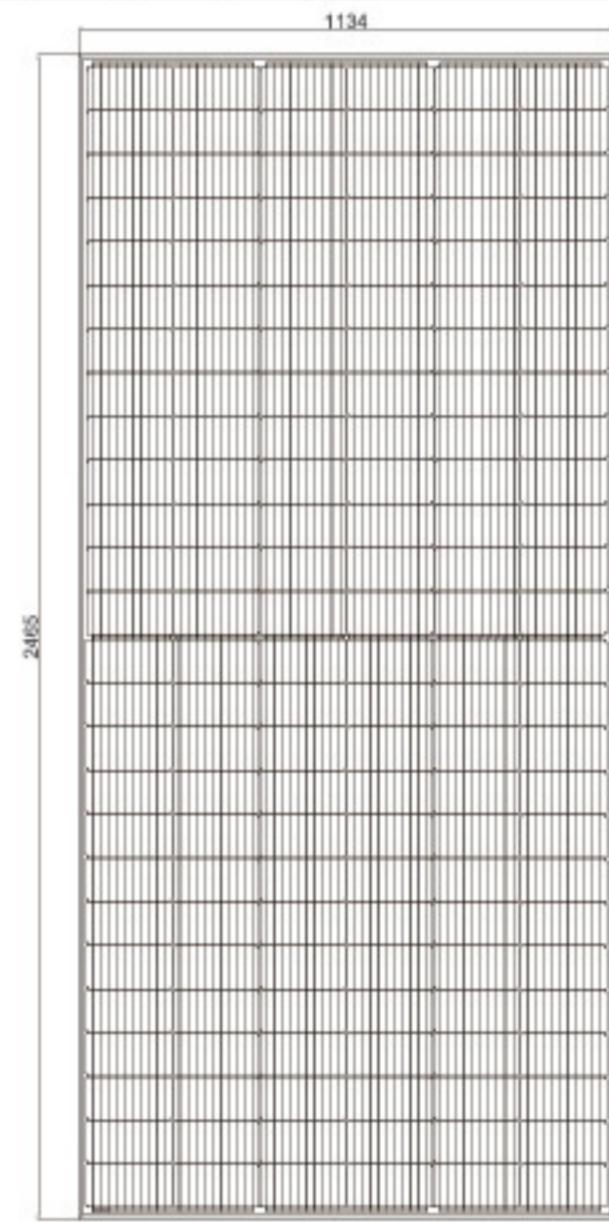


Front View

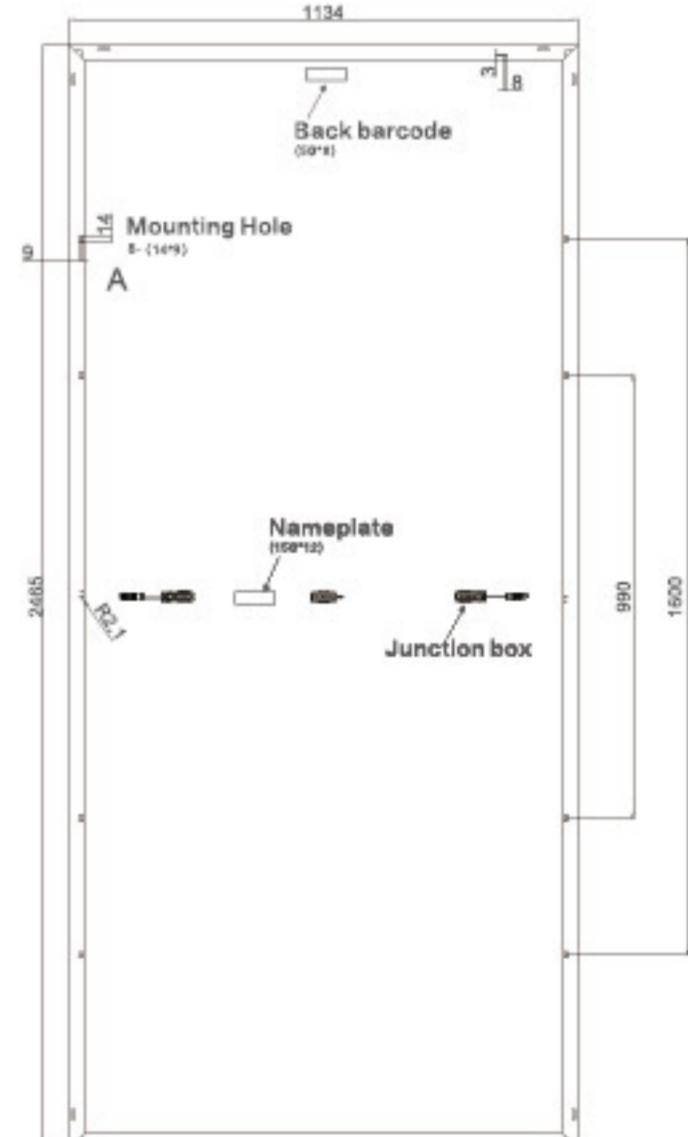

Rear View

The technical parameters contained in this technical parameter document may deviate slightly, and VEICHI does not guarantee their complete accuracy. Due to continuous innovation, research and development, and product improvement, VEICHI has the right to, without prior notice, Adjust the information in the technical parameter file at any time. When signing a contract, the customer should obtain the latest version of technical parameters as part of a binding contract signed by both parties.

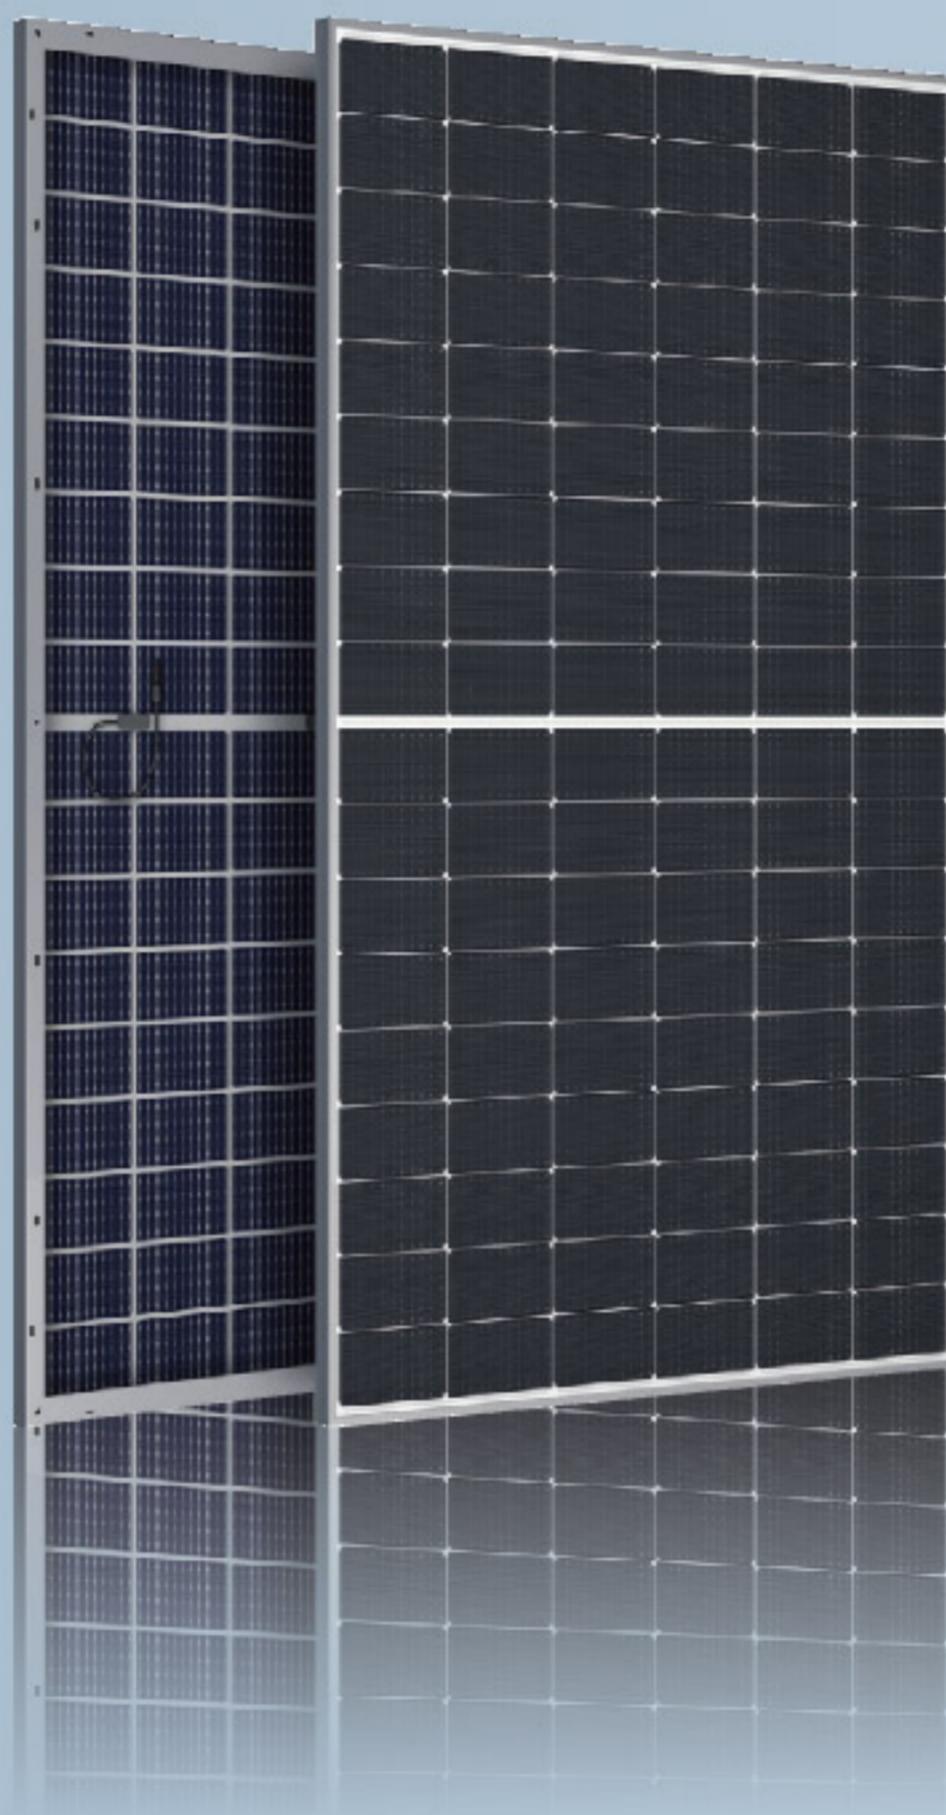

Suzhou Veichi Electric Co.,Ltd

NO.1000 Songjia Road,Guoxiang street, Wuzhong Economic and
Technological Development Zone,Suzhou

Email: overseas@veichi.com

Https: //www.veichi.com/

